



WET LOCATION EMERGENCY LIGHT




- IP65/Wet location rated
- Perfect for Indoor/Outdoor egress lighting
- Vandal resistant design
- Self-diagnostics standard on all units
- NiCad battery
- Surface/ceiling mount; recess available
- UV stabilized diffuser provides superior light output
- Utilizes a 24 Watt compact fluorescent lamp (1800 lumens output)
- 5-year unconditional warranty



ISOLITE FLW SERIES EMERGENCY LIGHT

Dimensions

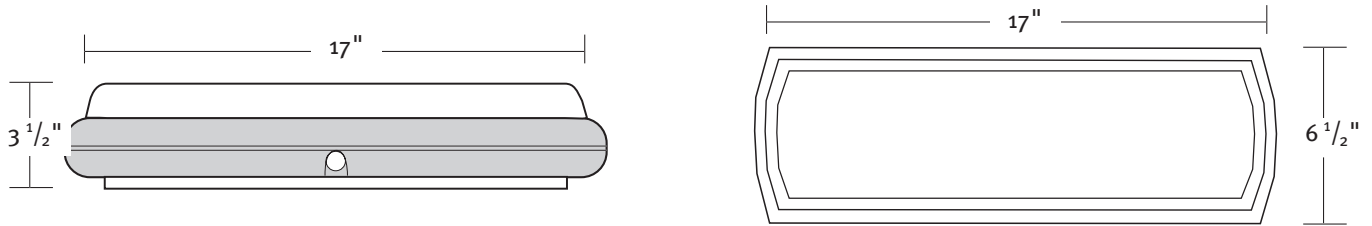

Specifications

Construction: High-quality vandal, corrosion and flame resistant RAL 7035 color polycarbonate (light grey)

Wet Location:

- IP65/Wet location rating due to advanced liquid silicon gasketing
- Completely sealed from moisture infiltration

Battery: Standard unit utilizes a 4-cell NiCad battery that provides a minimum of 90 minutes of emergency operation

Lamp: The FLW unit utilizes a 24 Watt compact fluorescent lamp (1800 lumens output) Less the 3% of lumens lost due to highly efficient reflector and lens design (included)

Reflector:

- Injection molded, self-extinguishing, UV stabilized polycarbonate
- Vacuum finished to enhance the highly reflective surface
- Supports components including the lamp holder and reflective hood

Diffuser:

- UV stabilized to provide superior output and reduce yellowing index
- Co-injection process increases strength and durability

Vandal Resistant Design:

- Fully enclosed and protected lamp assembly
- Vandal resistant flush housing latch clips ensure the protection of the FLW Series

Installation: Surface and recess ceiling or wall mount

Approvals: Listed by ETL UL924 Standard for damp and wet locations

Self Diagnostics: FLW Series comes standard with self-diagnostic that continually monitors the lamp, battery and circuitry for proper operation

Warranty: Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in Isolite manual. Lamps not warranted.

Ordering Information

Series	Lamp	Operation	Voltage	Self Diagnostics	Options
FLW	24 = 24 Watt Fluorescent Lamp	AC = AC Only EM=Battery Backup	U = Universal 120/277	SD = Self Diagnostics (Standard)	FT = Recessed Housing (T-Bar) FD = Recessed Housing (Dry Wall)

Example: FLW-24-EM-U-SD

Project _____

Date _____ Type _____

Catalog Number _____

Remarks _____

Visit us on the web at www.isolite.com or email sales@isolite.com



Call the Isolite office nearest you.

HEADQUARTERS
31 Waterloo Avenue
Berwyn, PA 19312
800-888-5483
610-647-8200
610-296-8952 Fax

WESTERN OFFICE
3563 Sueldo, Suite M
San Luis Obispo, CA 93401
800-799-5343
805-546-9669
805-546-9564 Fax