

## CMB

Thermoplastic LED Exit Sign and Emergency Combo

DATE:

PROJECT:

COMMENTS:



### FEATURES

- Two lamp heads are fully adjustable and draw 1.5W each.
- Universal mounting canopy included for ceiling mounting: universal, single, or double face.
- Quick-fit, snap-in installation with field selectable chevron directional indicators.
- Long life, high intensity LED array available in red or green.
- Approved for use in damp locations.
- Maintenance free, 3.6V nickel cadmium batteries provide 90 minutes of run time.
- Up to 2.5W remote capability with option to power remote heads if needed (two heads maximum).
- Meets CSA C22.2 No. 141-02.

### ORDERING INFORMATION *CMB-EM-R-U-WH-MTEBP-L1*

1. SERIES	2. OPERATION	3. LETTER COLOR	4. FACE COUNT	5. HOUSING COLOR	6. MOUNTING
<b>CMB</b>	<b>EM</b>	<b>R</b>	<b>U</b>	<b>BK</b>	<b>MTEBP</b>
	EM Ni-Cad Battery Backup	R Red G Green	U Universal	BK Black WH White	MTEBP Universal Mount
7. LAMP SOURCE	8. OPTIONS				
<b>L1</b>	<b>BLANK = NO OPTION</b>				
L1 LED 1.5W	SD Self-Diagnostics EB Remote Capacity <sup>1</sup>				

### ORDERING NOTES

- If using the remote capacity option without any remote lamp heads attached, the base unit run time is extended to greater than 2 hours.

### SPECIFICATIONS

#### CONSTRUCTION

- High impact housing designed with injection molded 5VA flame retardant thermoplastic.

#### ELECTRONICS

- Electronic control circuit and isolation transformer provide current control and circuit protection, ensuring optimum LED efficiency and life.
- 120/277 VAC with field selectable inputs.
- Solid state transfer relay utilized for reliability.

#### LETTERS

- 6" high; 0.75" stroke

#### TEMPERATURE RATING

- From 32°F to 122°F


#### APPROVALS

- UL 924
- NFPA Life Safety Code 101
- NFPA 70-NEC
- OSHA
- Damp Location Listed
- CEC Title 20 Compliant

#### WARRANTY

- Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted

### DIMENSIONS

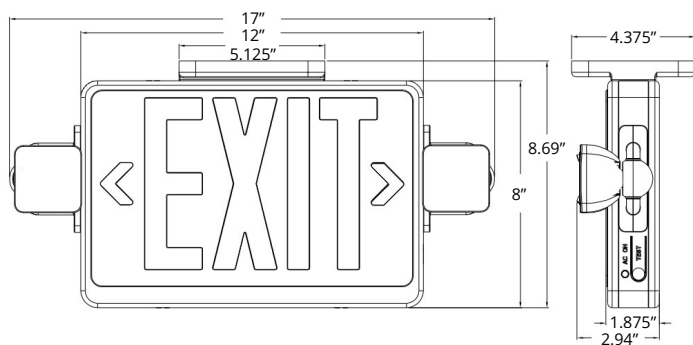

### ACCESSORIES; ORDER SEPARATELY

- WG-20.0LX19.0WX9.0D**  
Wireguard, Length: 20", Width: 19", Depth: 9"
- WG-26.0LX19.0WX9.0D**  
Wireguard, Length: 26", Width: 19", Depth: 9"