

DATE:

COMMENTS:

PROJECT

FEATURES

- Includes two top-mounted lighting heads that can be field modified for side-mount applications.
- Keyhole mounting slots and conduit knockouts are provided for additional mounting possibilities.
- UL listed for a minimum run-time of 90 minutes.
- Utilizes a maintenance free, sealed lead calcium battery.
- Snap fit door is secured by nickel plated steel counter sunk screws.
- Momentary test switch and AC status indicator are used to monitor normal and emergency power operation.
- Line-latch prevents unnecessary discharge of battery during installation. Loads will not illuminate until after application of utility power.
- Low voltage cut-off prevents battery damage and ensures positive charge acceptance following an extended discharge.
- Brownout sensing ensures emergency operation during periods of low line voltage.
- 120/277 VAC with field selectable inputs.



CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS
Only available with Adobe Acrobat and Acrobat Reader

ORDERING INFORMATION *ELP-6V28W-MB-2-W67*

1. SERIES

ELP

2. OPERATION

6V50W 6 Volts, 50 Watts
6V100W 6 Volts, 100 Watts
12V50W 12 Volts, 50 Watts
12V100W 12 Volt, 100 Watt

3. MOUNTING

MB

MB Back Mount

4. HEAD COUNT

2

2 Two Heads

5. LAMPS

H1220 Halogen 12V 20W
W67 Wedge 6V 7W
W129 Wedge 12V 9W

SPECIFICATIONS

CONSTRUCTION

- Injection Molded ABS housing with a 5VA flame retardant thermoplastic rating.

TEMPERATURE RATING

- From 68°F to 104°F


APPROVALS

- UL 924
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA

WARRANTY

- Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

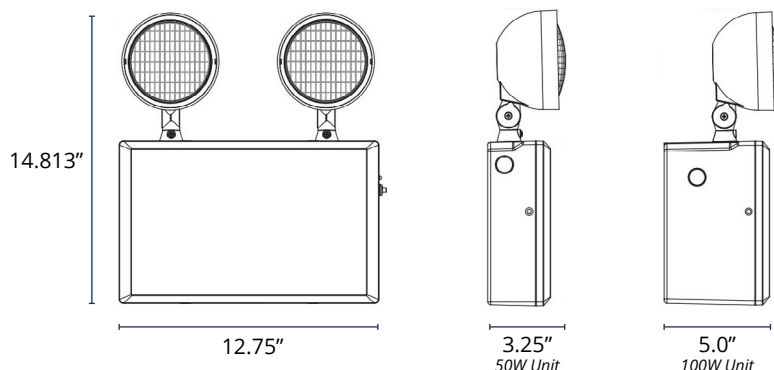

LAMP CHARTS

H - SEALED BEAM HALOGEN	
	12V
20W	H1220

W - WEDGE BASE		
	6V	12V
7W	W67	
9W		W129