

EU-CTMA

Connecticut & Massachusetts Compliant Indoor Mobility Exit Sign

DATE:

PROJECT

COMMENTS:

FEATURES

- Includes a 6" International Symbol of Accessibility or Dynamic Symbol of Accessibility.
- Long life nickel cadmium maintenance free battery provides the required 90 minutes of emergency operation.
- Solid state transfer relay uses no relay contacts to reduce oxidization and failure in order to ensure reliability.
- An electronic control circuit and an isolation transformer provides current control and circuit protection for high output, energy efficient LED technology.
- Line-latch prevents unnecessary discharge of battery during installation. Loads will not illuminate until after application of utility power.
- Brownout detection ensures emergency operation during periods of low line voltage.
- LED indicator is used to indicate AC presence.
- A push-to-test switch can be used to test the emergency operation.
- 120/277 VAC with field selectable inputs.

SYMBOL KEY



CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS
Only available with Adobe Acrobat and Acrobat Reader



DSA = Dynamic Symbol of Accessibility (CT)



ISA = International Symbol of Accessibility (MA)

ORDERING INFORMATION *EU-CTMA-AC-G-1C-DSA-BK-MBC*

1. SERIES	2. BATTERY TYPE	3. ILLUMINATION	4. SYMBOL	5. FACE COUNT
EU-CTMA	-	-	-	-
	AC AC Only EM Ni-Cad Backup Battery	G Green R Red	DSA Dynamic Symbol of Accessibility (CT) ISA International Symbol for Accessibility (MA)	1C Single Face, Clear Background 1M Single Face, Mirror Background 1W Single Face, White Background 2M Double Face, Mirror Background 2W Double Face, White Background
6. FRAME COLOR	7. MOUNTING	8. OPTIONS		
BK Black BA Brushed Aluminum WH White	MBC Back/Ceiling Mount ME End Mount / Side Mount MPAB 12" Swivel Pendant Kit (Black) MPABA 12" Swivel Pendant Kit (Brushed Aluminum) MPAW 12" Swivel Pendant Kit (White)	BLANK = NO OPTION EB Extended Run Time (EM Only)		

ACCESSORIES; ORDER SEPARATELY

- **WG-20.0LX19.0WX9.0D** = Wireguard, Length: 20", Width: 19", Depth: 9"
- **WG-26.0LX19.0WX9.0D** = Wireguard, Length: 26", Width: 19", Depth: 9"

SPECIFICATIONS

CONSTRUCTION

- Durable, die-cast aluminum
- White-baked powder coat finish panel construction
- High clarity acrylic

LETTERS

- 6" high; 0.75" stroke

ARROWS

- NFPA-type, universal field selectable chevrons.

WEIGHT

- 7 lb

TEMPERATURE RATING

- From 50°F to 113°F


APPROVALS

- CSA-US listed
- Meets or exceeds UL 924 standards
- State of Connecticut Building Code Paragraph 1011.1.2
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA
- BAA Compliant


WARRANTY

- Isolite offers a 5-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

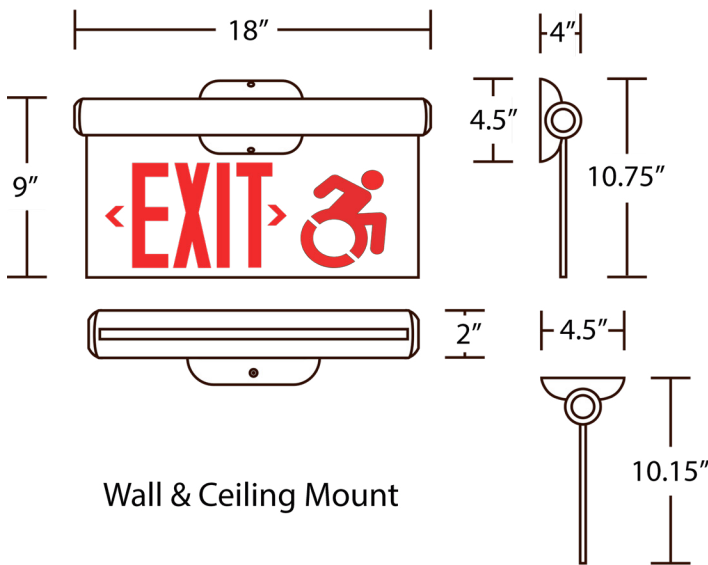

Wall & Ceiling Mount

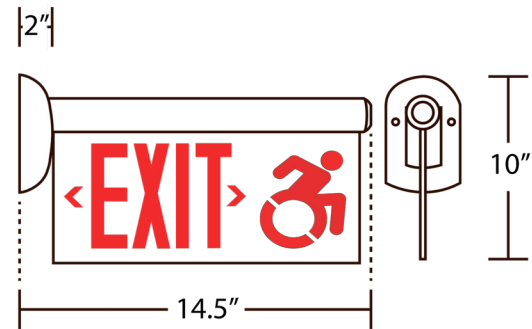

End Mount