



LP2H

Steel Exit & Emergency Combo

DATE: [REDACTED]	COMMENTS: [REDACTED]
PROJECT [REDACTED]	

FEATURES

- Heads utilize the MR16 energy efficient, high output LEDs.
- Utilizes attractive, contemporary 20 gauge steel housing with a universal face.
- Sealed external momentary test switch and dual AC presence and Hi-Charge status.
- Maintenance-free, sealed nickel cadmium batteries provide at least 90 minutes of emergency run-time.
- Line-latch prevents unnecessary discharge of battery during installation. Loads will not illuminate until after application of utility power.
- Battery is protected by short circuit protection.
- Exit sign compatible with remote exit signs.
- Brownout detection ensures emergency operation during periods of low line voltage.
- 120/277 VAC with field selectable inputs (with the exception of the TD (Time Delay) option which requires voltage specification upon ordering).



CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS
Only available with Adobe Acrobat and Acrobat Reader

ORDERING INFORMATION *LP2H-LC-12V27W-G-2-WH-MB-2-BRH-L65*

1. SERIES	2. OPERATION TYPE	3. OPERATION	4. ILLUMINATION	5. FACE COUNT	6. FRAME COLOR						
LP2H	-	-	-	-	-						
	LC Lead Calcium Battery Backup	<table border="1"> <tr> <td>6V18W 6 Volts, 18 Watts</td> <td>12V27W 12 Volts, 27 Watts</td> </tr> <tr> <td>6V27W 6 Volts, 27 Watts</td> <td>12V36W 12 Volts, 36 Watts</td> </tr> <tr> <td>6V36W 6 Volts, 36 Watts</td> <td></td> </tr> </table>	6V18W 6 Volts, 18 Watts	12V27W 12 Volts, 27 Watts	6V27W 6 Volts, 27 Watts	12V36W 12 Volts, 36 Watts	6V36W 6 Volts, 36 Watts		G Green R Red	1 Single 2 Double U Universal	WH White BK Black
6V18W 6 Volts, 18 Watts	12V27W 12 Volts, 27 Watts										
6V27W 6 Volts, 27 Watts	12V36W 12 Volts, 36 Watts										
6V36W 6 Volts, 36 Watts											
	NC Ni-Cad Battery Backup	<table border="1"> <tr> <td>6V22W 6 Volts, 22 Watts</td> <td>12V42W 12 Volts, 42 Watts</td> </tr> <tr> <td>6V42W 6 Volts, 42 Watts</td> <td></td> </tr> </table>	6V22W 6 Volts, 22 Watts	12V42W 12 Volts, 42 Watts	6V42W 6 Volts, 42 Watts						
6V22W 6 Volts, 22 Watts	12V42W 12 Volts, 42 Watts										
6V42W 6 Volts, 42 Watts											
7. MOUNTING	8. HEAD COUNT	9. HEAD STYLE	10. LAMP SOURCE	11. OPTIONS							
	-	-	-	-							
MTEB Top/End/Back Mount MPAB 12" Swivel Mount (Black) MPAW 12" Swivel Mount (White)	0 Zero Lamps 1 One Lamp 2 Two Lamps	XRH XRH Lamp Heads	See Lamp Chart for Part # Example: LED Single Head 12V 5W = "L125"	BLANK = NO OPTION SD Self-Diagnostics AA Audible Alarm (Buzzer) FL Flasher FA Fire Alarm Interface TD1 Time Delay - 120 VAC (15 min.) TD2 Time Delay - 277 VAC (15 min.)							

ACCESSORIES; ORDER SEPARATELY

- **WG-16.5LX14.0WX3.0D** = Wireguard, Length: 16.5", Width: 14", Depth: 3"
- **WG-16.5LX14.0WX6.0D** = Wireguard, Length: 16.5", Width: 14", Depth: 6"
- **WG-20.0LX19.0WX9.0D** = Wireguard, Length: 20", Width: 19", Depth: 9"
- **WG-26.0LX19.0WX9.0D** = Wireguard, Length: 26", Width: 19", Depth: 9"

SPECIFICATIONS

CONSTRUCTION

- Durable, 20 gauge steel

LETTERS

- 6.0" height; 0.75" stroke

ARROWS

- NFPA-type, universal field selectable chevrons.

TEMPERATURE RATING

- From 50°F to 104°F


APPROVALS

- CSA-US listed
- NFPA 101 Life Safety Code
- NFPA 70-NEC
- OSHA
- BAA Compliant

WARRANTY

Isolite offers a 3-year limited warranty. For further details, refer to General Warranty and Obligations in the Isolite manual or on our website. Lamps not warranted.

DIMENSIONS

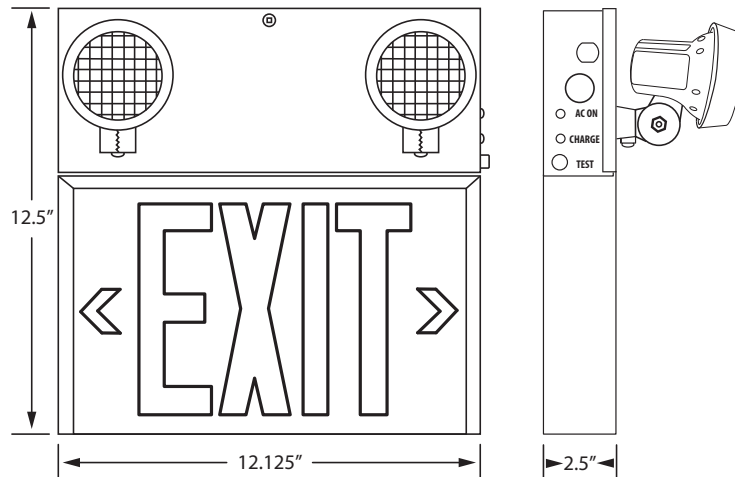

LAMP CHARTS

L - LED		
	6V	12V
2W		L122
5W	L65	L125
7W	L67	L127