



VTF-LED

IP66 Rated LED Industrial Luminaire

DATE:

PROJECT:

COMMENTS:

FEATURES

- Corrosion, flame and vandal resistant wet location luminaire.
- Ideal illumination for canopies, warehouses, schools, breezeways and service corridors.
- UV stabilized polycarbonate, liquid silicone perimeter gasket with memory retention.
- Frosted UV stabilized polycarbonate diffuser eliminates glare and provides even light distribution.
- Standard surface mount configuration.
- Available in 3000K, 4000K, or 5000K.
- Available in 100V-277V or 347V-480V input voltages.
- Up to 7,919 lumen output.



RoHS
Compliant

CLICK THE IMAGE TO VIEW ALTERNATE PRODUCT PHOTOS

Only available with Adobe Acrobat and Acrobat Reader

ORDERING INFORMATION *VTFLED-4-AC-LO-WT30-120/277V-AC*

1. SERIES	2. SIZE	3. OPERATION	4. OUTPUT	5. COLOR TEMPERATURE
VTFLED	4			
	4 4 Feet	AC AC Only EM Ni-Cad Battery Backup	LO Low Output ² HO High Output	WT30 3000K WT40 4000K WT50 5000K
5. INPUT VOLTAGE	6. MOUNTING	7. OPTIONS		
120/277V 120-277V 347/480V 347-480V	AC Aviation Cable ³ CH Chain Hang Kit ⁴ DPK Double Pendant Kit ⁴ JM Junction Mount ⁵ PM Pivot Mount	QMB Quick Mount Bracket ⁶ SPK Single Pendant Kit ⁴ SVLDPK Swivel Double Pendant Kit ⁴ SVLSPK Swivel Single Pendant Kit ⁴ TM Trunnion Mount ⁴	BLANK = NO OPTION EOS Occupancy Sensor FA Fully Assembled ⁷ FP Fuse Protection (3A) SP Surge Protection (10KA) SS Stainless Steel Clips TP Tamperproof Screws	

ORDERING NOTES

1. Emergency pack 120-277V; 10W/1440 lm.
2. No DLC for LO.
3. Specify length for AC:50", 72", 100", 150", 250" fully adjustable.
4. SPK, DPK, CH, TM, SVLDPK, & SVLSPK options must specify length.
5. JM option - the unit is no longer wet location, but damp location.
6. QMB must be used with JM.
7. Includes latches and grommets installed at the factory. Can be combined with the JM option.

LAMP OUTPUT

LAMP TYPE	LUMEN OUTPUT
LO-WT30	4744
LO-WT40	4874
LO-WT50	5041
HO-WT30	7594
HO-WT40	7726
HO-WT50	7919

SPECIFICATIONS
CONSTRUCTION

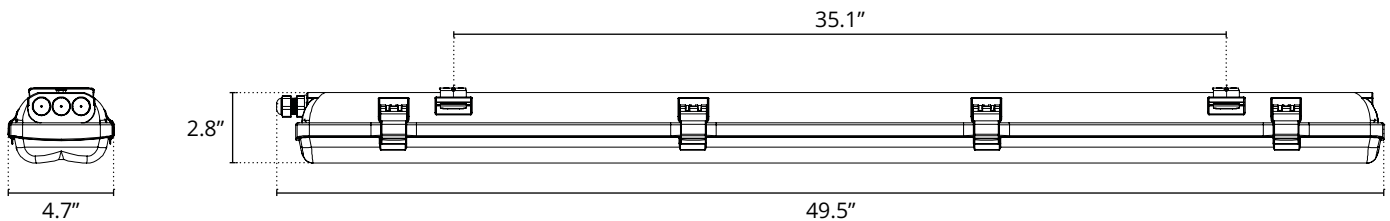

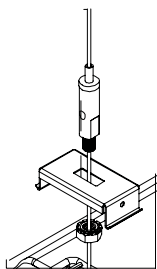
- Corrosion, flame and vandal resistant housing.
- 100% UV stabilized polycarbonate, liquid silicone perimeter gasket.
- The frosted UV stabilized polycarbonate diffuser.

OUTPUT

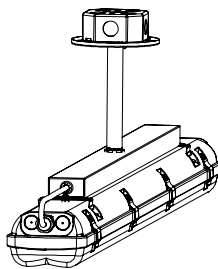
- **LO:** 4744 - 5041 lm
- **HO:** 7594 - 7919 lm

TEMPERATURE RATING

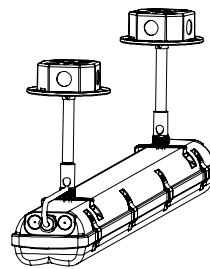
- **AC Only:** -40°F to 104°F (-20°C to 40°C)
- **EM Backup:** 32°F to 104°F (0°C to 40°C)

DIMENSIONS

MOUNTING OPTIONS

 Surface Mount
(Standard)


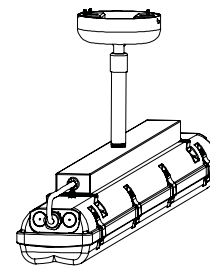
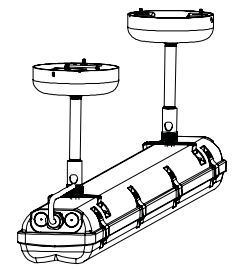

Aviation Cable



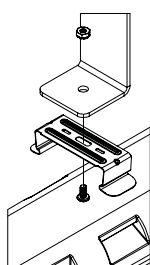
Single Pendant Kit



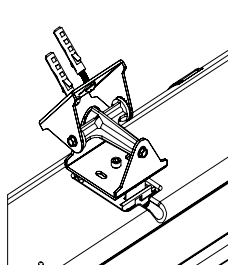
Double Pendant Kit


 Swivel Single
Pendant Kit

 Swivel Double
Pendant Kit


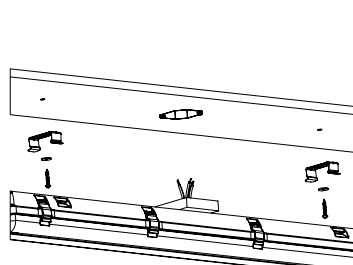
Chain Hang Kit



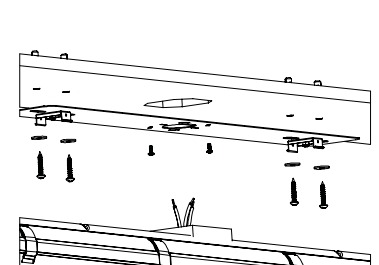
Trunnion Mount



Pivot Mount



Junction Mount



Quick Mount Bracket